



2in
1out

Signal Combiner

Terrestrial + SAT

This SCHWAIGER® signal combiner is used to combine a SAT IF signal (coming from the LNB directly) and a terrestrial signal (coming from the antenna directly) to a single output. A receiving device can be connected or the output can be used to establish a connection

with an antenna socket. From there, both signals can be splitted again.




ARTICLE INFORMATION

Article Nr
EAN

ASW800 211
4004005800043



Last updated: 12.11.2018

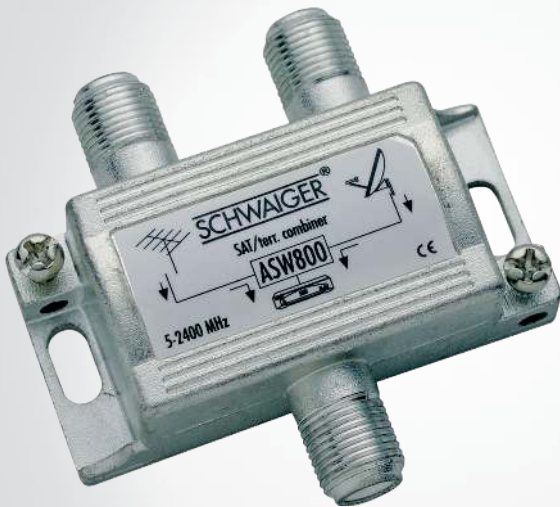

FEATURES (ASW800 211)

- Direct Current pass (DC)
- combining SAT and radio signals to a single line

TECHNICAL DATA

Colour	silver
Connections (input)	3x F jack
Connections (output)	1x F jack
Frequency range	5 - 862 MHz (TV / radio) 950 - 2300 MHz (SAT)
Transmission loss	1 dB (TV / radio) < 2 dB (SAT)
Weight	81 g
Dimensions (width)	48 mm
Dimensions (height)	92 mm
Dimensions (depth)	29 mm
Packaging	carton

