

★ ★ ★  
PROFESSIONAL



## Pass-Through Socket (19 dB)

This SCHWAIGER® pass-through socket is suitable for use on CATV or MATV antenna systems. It is designed to be a pass-through or terminal socket. When used as a terminal socket, the included resistor has to be inserted. The socket is suitable for reception of

TV and radio signals and CANNOT be used as a single socket without terminating resistor. Due to a special clamping technique, the cable connections do not have to be screwed.


### ARTICLE INFORMATION

Article Nr  
EAN

DSG 021  
4004005513509



Last updated: 20.01.2017

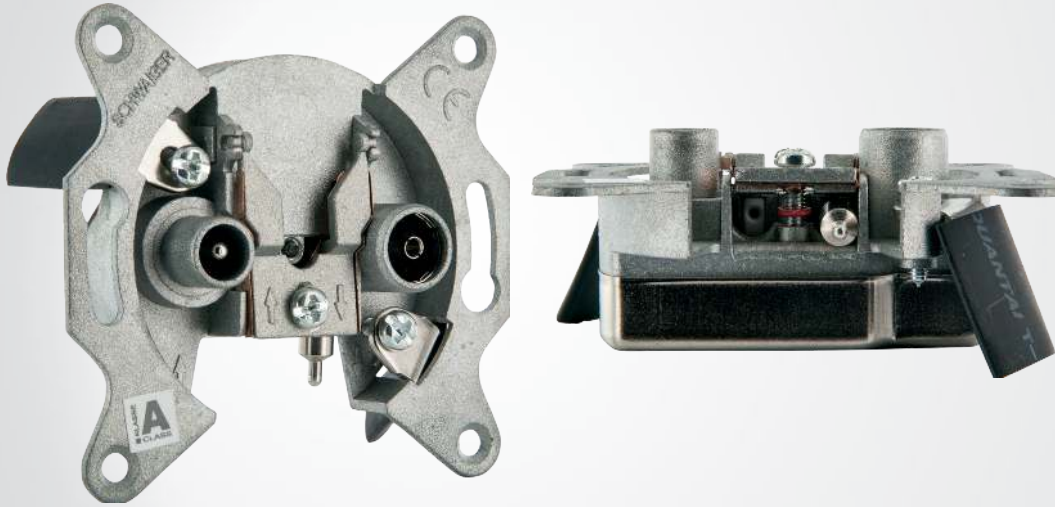


(DSG 021)

- clamping technology for screwless fastening of the inner conductor ( $\varnothing$  0.8 to 1.3 mm)
- can be used as pass-through socket or terminal box
- can only be used as terminal socket in combination with a 75 ohms resistor (included)
- Normen, siehe Konformitätserklärung (Support & Service)

## TECHNICAL DATA

Material of product	aluminium die cast
Colour	silver
Classification	class A
Connections	1x IEC jack 1x IEC connector
Frequency range	5 - 2150 MHz (TV) 5 - 2150 MHz (radio)
Isolation	862/2150 MHz > 22/20 dB (TV / radio) 862/2150 MHz > 32/22 dB output/TV
Tap loss	(typ.) 19 dB (terrestrial/SAT)
Transmission loss	2,5 dB (terrestrial/SAT)
Mounting depth	22 mm
Dimensions (width)	70 mm
Dimensions (depth)	30 mm
Dimensions (height)	66 mm
packaging	sliding blister 3c

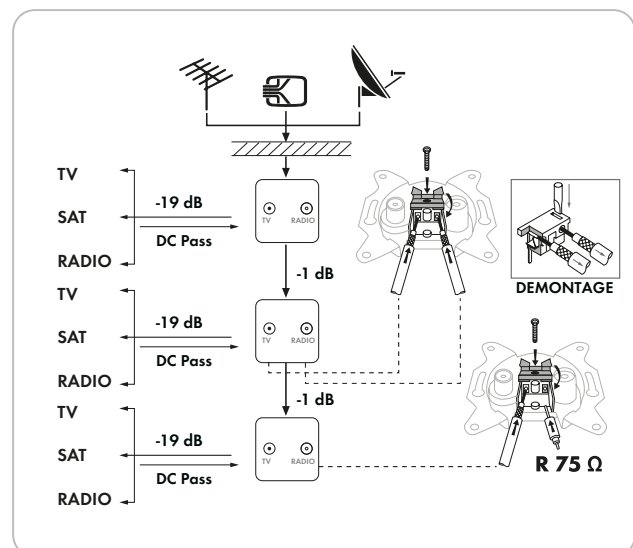

Last updated: 20.01.2017