



## Pass-Through Socket or Distribution Socket (4 dB)

This SCHWAIGER® pass-through or distribution socket is suitable for use on single, community and broadband cable antenna systems. It is designed to be a pass-through or terminal socket. When used as a terminal socket, the included resistor has to be

inserted. The socket is suitable for reception of TV and radio signals and CANNOT be used as a single socket. Thanks to a special clamping technique, the cable connections do not have to be screwed together.



### ARTICLE INFORMATION


Article Nr  
EAN

DSV20 011  
4004005200041



4 004005 200041

Last updated: 23.03.2016

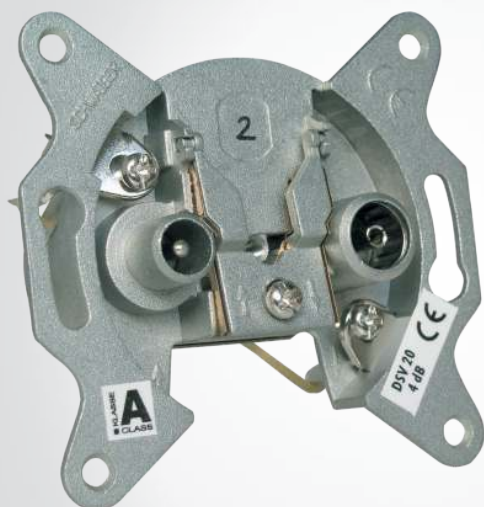

## FEATURES (DSV20 011)

- hinged clamp for fastening of the outer conductor (max 7.5 mm)
- clamping technology for screwless fastening of the inner conductor (Ø 0.8 - 1.3 mm)
- crimping fastener for plaster inserts (55mm)
- Normen, siehe Konformitätserklärung (Support & Service)

## TECHNICAL DATA

Norm/Classification	class A
Connections	1x IEC jack 1x IEC connector
Frequency range	4 - 862 MHz
Isolation	> 26 dB (TV/TV)

Tap loss	5 dB (typical)
Mounting depth	22 mm
Material of product	aluminium die cast corrosion-protected
packaging	carton

Last updated: 23.03.2016