



SAT

☆☆☆
STANDARD

1,5 m
↔

75
dB

2x
shielded

SAT Connection Cable (75 dB)

F connector > F connector

This SCHWAIGER® SAT connection cable is used to connect a satellite receiver to a satellite connector socket. This cable is shielded twice and, thus, less susceptible to

any kind of signal interference. The cable has a shielding value of 75 dB.



ARTICLE INFORMATION

Article Nr
EAN

KVC15 533
4004005203400



Last updated: 23.03.2016




FEATURES (KVC15 533)

- shielded twice for low susceptibility to electromagnetic interference
- solid nickel-plated internal PIN
- inner conductor made of copper for good signal transmission
- solid F connector, moulded on both sides
- connector with knurled nut

TECHNICAL DATA

quality	* Standard
Connections	2x F connector
Impedance	75 Ohm
Plugs	plastic fully shielded
Cable design	0.5 mm (inner conductor) 2.8 mm (dielectric) 5 mm (sheath)
Shielding value	> 75 dB
Shielding	completely shielded
Shielding material	aluminium composite film/64-wire braid
Cable length	1.5 m
Colour	black
packaging	sealed blister SBL03

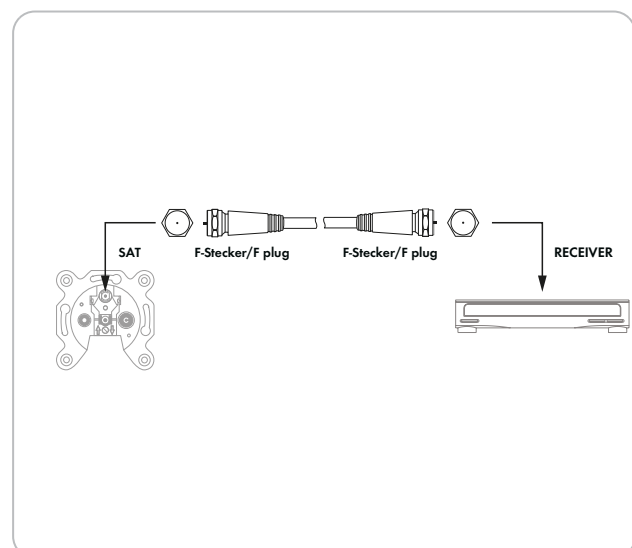

Last updated: 23.03.2016