



SAT

☆☆☆  
**STANDARD**

7,5 m  
↔

75 dB

2x shielded

## SAT Connection Cable (75 dB)

F connector > F connector

This SCHWAIGER® SAT connection cable is used to connect a satellite receiver to a satellite connector socket. This cable is shielded twice and, thus, less susceptible to

any kind of signal interference. The cable has a shielding value of 75 dB.



### ARTICLE INFORMATION

Article Nr  
EAN

KVC75 532  
4004005203448



Last updated: 25.01.2017




(KVC75 532)

- shielded twice for low susceptibility to electromagnetic interference
- solid nickel-plated internal PIN
- inner conductor made of copper for good signal transmission
- solid F connector, moulded on both sides
- connector with knurled nut

## TECHNICAL DATA

Quality	* Standard
Connections	2x F connector
Colour	white
Impedance	75 Ohm
Plugs	plastic fully shielded
Cable design	0.5 mm (inner conductor) 2.8 mm (dielectric) 5 mm (sheath)
Shielding	shielded twice
Shielding value	> 75 dB
Shielding material	aluminium composite film/64-wire braid
Inner conductor	CCS
Cable length	7.5 m
Packaging	sealed blister SBL04

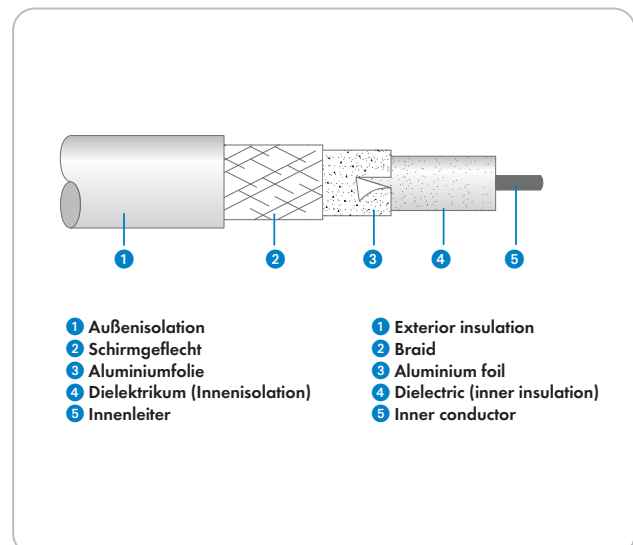

Last updated: 25.01.2017