

★ ★ ★
PROFESSIONAL



Antenna Socket (8 dB)

directional coupler socket

This SCHWAIGER® antenna socket is suitable for use on CATV, broadband cable TV systems and satellite TV systems. Thanks to the special clamping technique, the cable connections do not have to be screwed.




ARTICLE INFORMATION

Article Nr
EAN

RDS30 531
4004005504170



Last updated: 23.03.2016

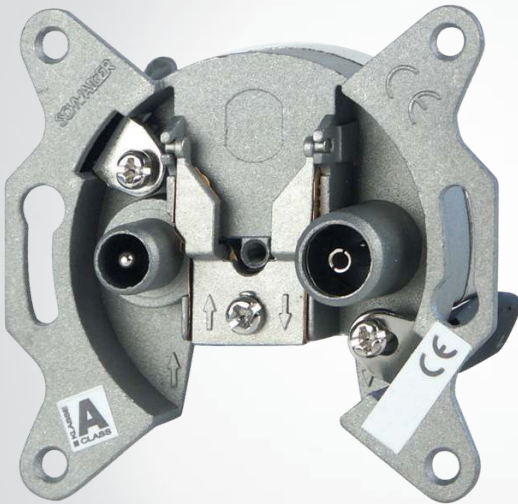

FEATURES (RDS30 531)

- hinged clamp for fastening of the outer conductor (max 7.5 mm)
- clamping technology for screwless fastening of the inner conductor (Ø 0.8 - 1.3 mm)
- crimping fastener for plaster inserts (55mm)

TECHNICAL DATA

quality	** Professional
Technology	broadband cable systems/community antenna system/satellite systems
Connections	1x IEC jack 1x IEC connector
Connections (input)	1x detachable contact clamping spring
Connections (output)	1x detachable contact clamping spring
Frequency range	5 - 2150 MHz
Isolation	862/2150 MHz 28/22 dB (TV / radio) 862/2150 MHz 32/22 dB output/TV

Tap loss	(typ.) 8,5 dB (SAT) (typ.) 7 dB (terrestrial)
Transmission loss	4 dB (terrestrial) 6 dB (SAT)
Mounting depth	22 mm
Material of product	aluminium die cast
Dimensions (width)	70 mm
Dimensions (height)	66 mm
Dimensions (depth)	22 mm
packaging	sealed blister SBL07

Last updated: 23.03.2016