



DVB-T Rod Antenna (Active)

with magnetic base and amplifier

This SCHWAIGER® rod antenna is perfect for terrestrial reception of TV and radio stations. It is equipped with a built-in amplifier (22 dB) and is suitable for indoor and outdoor use. Since the integration of LTE as standard for mobile internet, there have sometimes been

problems with the reception of digital terrestrial TV signals. For this reason, the antenna is equipped with an LTE band-stop filter which filters the LTE mobile telephony frequencies up to 790 MHz. This makes for trouble-free reception of DVB-T2 HD signals.



ARTICLE INFORMATION

Article Nr
EAN

ANT04DTA 031
4004005040401



Last updated: 20.02.2017




(ANT04DTA 031)

- built-in LTE band-stop filter for filtering LTE mobile telephony frequencies
- reception of analogue and digital TV signals in the VHF and UHF range
- reception of digital radio stations (DAB+ and FM)
- active DVB-T antenna with magnetic base and built-in amplifier
- base adheres magnetically to metal
- power supply via coaxial cable directly from the DVB-T receiver or the TV

TECHNICAL DATA

Quality	*** Ultimate
Technology	DVB-T
Point of use	indoor and outdoor use
Connections	1x IEC connector
Elements	round rod
Antenna gain	(max.) 22 dB
Cable length	3 m
Frequency range	87,5 - 240 MHz (VHF) 470 - 790 MHz (UHF)
Power supply	via coaxial cable: 5 V DC
Material of product	metal
Colour	black
Dimensions (width)	55 mm
Dimensions (depth)	55 mm
Dimensions (height)	370 mm
Packaging	sliding blister SF

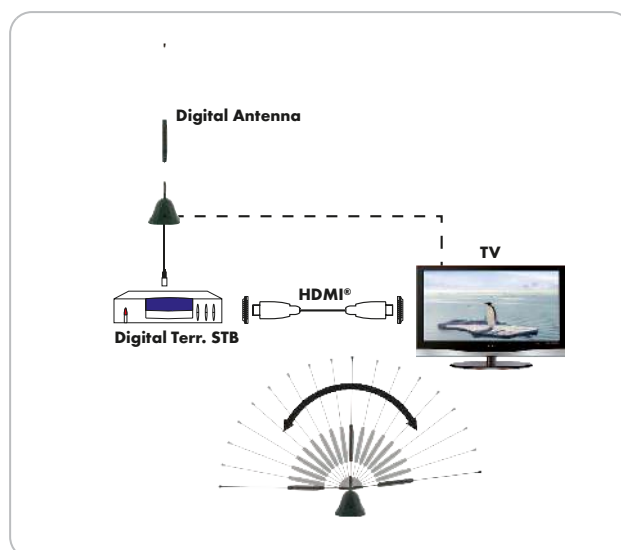

Last updated: 20.02.2017