



## SAT > IP Multi Switch

with 4 Tuners + Network Output

The SCHWAIGER<sup>®</sup> SAT > IP multi switch is used to distribute classic satellite signals to internet-based terminal devices. This way, a household can be provided with TV stations via tablets, computers, laptops, smart phones, Connected TV, games consoles and media

players. This new technique can easily be combined with existing satellite systems. The IP signals are fed into the router and simultaneously provide four clients via LAN or WLAN.



### ARTICLE INFORMATION

Article Nr MS41IP 031  
EAN 4004005233605



Last updated: 23.03.2016




## FEATURES (MS41IP 031)

- turns classic satellite signal into IP
- 4 tuners for feeding a Quattro Band, Quad or Unicable LNB
- IP signal distribution via LAN, WLAN or Powerline to up to 4 network connections possible
- terminal device has to support the SAT> IP protocol
- possible clients with software or app with SAT> IP protocol: tablet, computer, laptop, smart phone, games console, media player, etc.

## TECHNICAL DATA

quality	*** Ultimate
Point of use	indoor use
Connections (input)	4x F connector 1x USB 2.0 A jack (USB for update)
Connections (output)	1x RJ45 jack (8P8C) (ethernet)
Frequency range	950 - 2150 MHz (SAT)
Power consumption	100 - 240 V AC external: 12 V DC , max. 5 A, 30 W
Operating temperature	0 - 70 °C
Weight	400 g
Dimensions (width)	250 mm
Dimensions (depth)	35 mm
Dimensions (height)	125 mm
packaging	clamshell SF

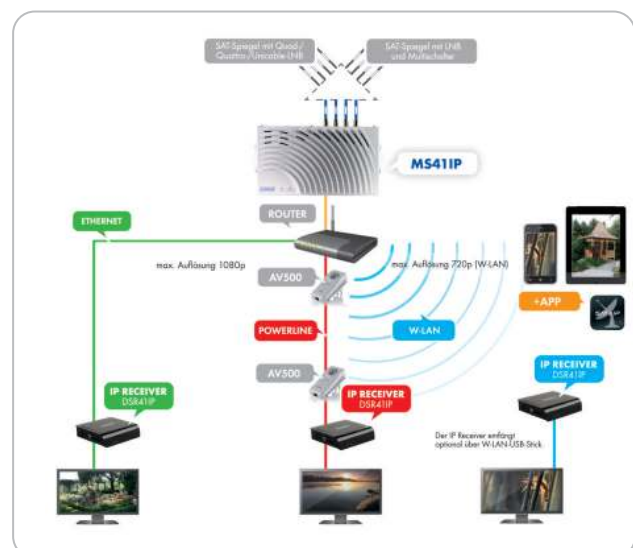

Last updated: 23.03.2016