

## Broadband Pass-Through Socket (8 dB)

This SCHWAIGER® pass-through antenna socket is suitable for use on CATV, MATV and broadband cable TV systems. This wall socket is provided with two directional couplers. Thanks to the special clamping technique, the cable connections do not have to be screwed.



### ARTICLE INFORMATION


Article Nr  
EAN

RDS646/8 011  
4004005646016



4 004005 646016

Last updated: 23.03.2016

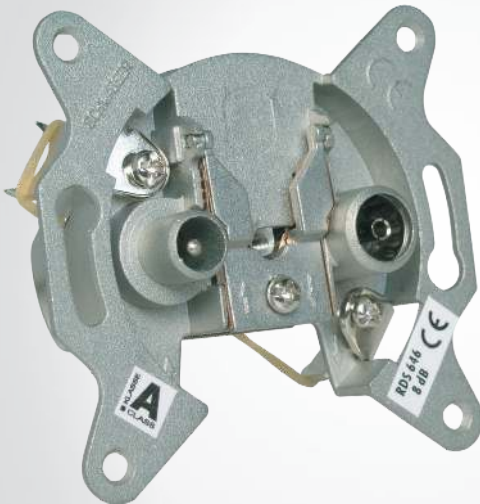

## FEATURES (RDS646/8 011)

- hinged clamp for fastening of the outer conductor (max 7.5 mm)
- clamping technology for screwless fastening of the inner conductor (Ø 0.8 - 1.3 mm)
- crimping fastener for plaster inserts (55mm)
- Normen, siehe Konformitätserklärung (Support & Service)

## TECHNICAL DATA

Norm/Classification	class A
Connections	1x IEC jack 1x IEC connector
Frequency range	5 - 2150 MHz
Isolation	860/2150 MHz 28/22 dB (TV / radio) 860/2150 MHz 28/22 dB output/TV
Tap loss	(typ.) 9 dB (SAT) (typ.) 8 dB (terrestrial)

Transmission loss	4 dB (terrestrial) 5 dB (SAT)
Mounting depth	22 mm
Material of product	aluminium die cast corrosion-protected
Dimensions (width)	70 mm
Dimensions (height)	66 mm
packaging	carton

Last updated: 23.03.2016