

★☆☆
STANDARD4
LEDs

SAT Finder (3+1 LED)

This SCHWAIGER® SAT finder allows for fast and accurate alignment of a satellite system. Three LEDs indicate the respective measuring range. The operating status of the SAT finder is shown by a power LED.

ARTICLE INFORMATION

Article Nr
EANSF440 221
4004005440225

Last updated: 23.03.2016




FEATURES (SF440 221)

- especially suitable for ASTRA and EUTELSAT
- clear display of all data due to bright LEDs
- light-emitting diodes with broad measurement range
- fast and precise alignment of satellite offset antennas
- power supply through the connected receiver

TECHNICAL DATA

Connections	2x F jack
Display	4 LED
Frequency range	950 - 2150 MHz
display for signal quality	yes
Display of signal strength	yes
Transmission loss	< 8 dB
Power supply	12 - 20 V DC
	80 mA
Material of product	Aluminium
Accessories (included)	detailed user manual
Dimensions (width)	93 mm
Colour	silver
Dimensions (height)	49 mm
Dimensions (depth)	30 mm
packaging	sliding blister 3b

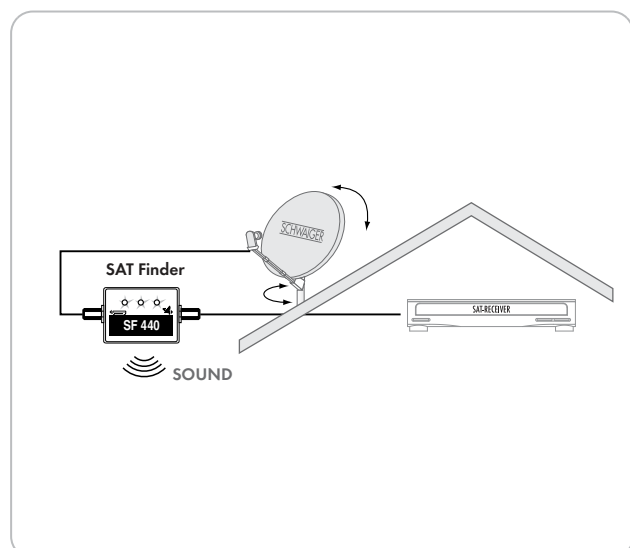

Last updated: 23.03.2016