



☆☆☆  
STANDARD

4  
LEDs

## SAT Finder (3+1 LED)

This SCHWAIGER® SAT finder allows for fast and accurate alignment of a satellite system. Three LEDs indicate the respective measuring range. The operating status of the SAT finder is shown by a power LED.



### ARTICLE INFORMATION

Article Nr  
EAN

SF440 531  
4004005504224



Last updated: 23.03.2016




## FEATURES (SF440 531)

- especially suitable for ASTRA and EUTELSAT
- clear display of all data due to bright LEDs
- light-emitting diodes with broad measurement range
- fast and precise alignment of satellite offset antennas
- power supply through the connected receiver

## TECHNICAL DATA

quality	* Standard
Connections	2x F jack
Display	4 LED
Frequency range	950 - 2150 MHz
Display of signal strength	yes
display for signal quality	yes
Transmission loss	< 8 dB
Power supply	12 - 20 V DC
	80 mA
Material of product	Aluminium
Accessories (included)	detailed user manual
Dimensions (width)	93 mm
Colour	silver
Dimensions (height)	49 mm
Dimensions (depth)	30 mm
packaging	sealed blister SBL07

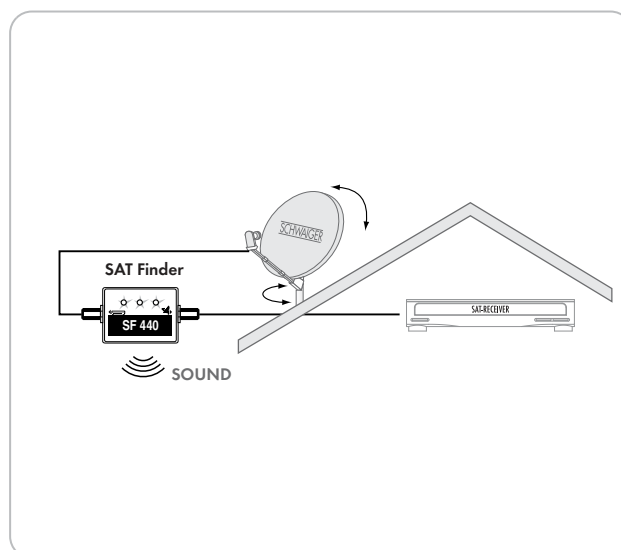

Last updated: 23.03.2016