

SAT

Single Antenna Socket or Stub Socket (2.5 dB)

This SCHWAIGER® single antenna socket is suitable for use on single, community, broadband cable and satellite systems. Due to the special clamping technique, the cable

connections do not have to be screwed together.




ARTICLE INFORMATION

Article Nr DSE650 011
 EAN 4004005650020



Last updated: 18.01.2017

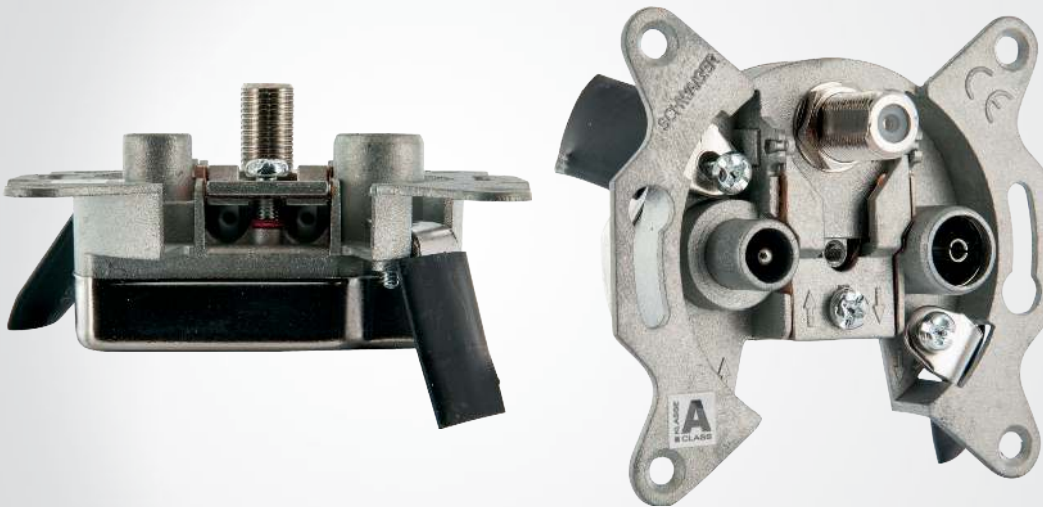

(DSE650 011)

- hinged clamp for fastening the outer conductor
- clamping technology for screwless fastening of the inner conductor (\varnothing 0.8 to 1.3 mm)
- can only be used as a single socket
- DC passage for LNB control via the satellite receiver on the SAT connection
- crimping fastener for plaster inserts (55mm)
- Normen, siehe Konformitätserklärung (Support & Service)

TECHNICAL DATA

Colour	silver
Classification	class A
Connections (input)	1x detachable contact clamping spring
Connections (output)	1x F jack 1x IEC jack 1x IEC connector
Frequency range	950 - 2150 MHz (SAT) 5 - 862 MHz (TV) 5 - 139 MHz (radio)
Isolation	> 24 dB (SAT/terrestrial)
Tap loss	2,5 dB (SAT) 2,5 dB (TV) 5,5 dB (radio)
Mounting depth	22 mm
Material of product	aluminium die cast corrosion-protected
Dimensions (width)	70 mm
Dimensions (height)	66 mm
Dimensions (depth)	22 mm
packaging	carton
Last updated:	18.01.2017

