



★★★
PROFESSIONAL



Digital Quattro LNB

with weather-resistant cover

This SCHWAIGER® Quattro LNB, which is suitable for multifeed systems, is used to establish a digital-enabled satellite system for more than 4 subscribers (when used together with a multi switch). The F connections of the

LNB are protected by an extendible weather-resistant cover.



ARTICLE INFORMATION


Article Nr
EAN

SPS6918 021
4004005691818



4 004005 691818

Last updated: 27.03.2017

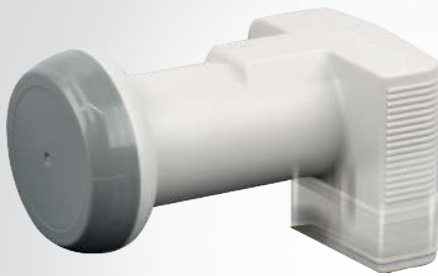

**LOW
NOISE**
Rauscharm

(SPS6918 021)

- reception system for setting up multi-subscriber satellite systems in combination with a multi switch
- suitable for multifeed systems
- F connectors are protected by extendible weather-resistant cover
- weather protection due to weather-resistant plastic cover
- fully encapsulated housing

TECHNICAL DATA

Reception system	QUATTRO (4+ Subscribers)	Polarisation	isolation: > 25 dB
Connections	4x F jack	Power supply	vertical: 11,5 - 14,2 V horizontal: 15,8 - 19 V
Input frequency	10,70 - 11,70 GHz (low) 11,70 - 12,75 GHz (high)	Power consumption	< 110 mA
Output frequency	950 - 2,150 MHz	Feed diameter	40 mm
Isolation	> 25 dB	Material of product	plastic weather-resistant
Oscillation frequency	9,75 GHz (low) 10,6 GHz (high)	Colour	light gray
Amplification (typical)	55 dB	Dimensions (width)	122 mm
Control function	0 kHz (low) 22 kHz (high)	Dimensions (height)	79 mm
		Dimensions (depth)	50 mm
		Packaging	clamshell SF

Last updated: 27.03.2017